


Anti Carbonation Coating for Concrete

PACKAGING



MIXING




APPLICATION



USES



SUBSTRATES



MATERIALS:

Natural Sealer (solvent based sealer) is manufactured by Construction Chemicals.

SURFACE PREPARATION:


All surfaces must be clean and sound and free of grease, dust, coatings and other contaminants. New concrete must have cured for 28 days or more.

WORKMANSHIP:

Apply products in accordance with the manufacturers written instructions and good trade practice.

APPLICATION:

Apply two coats of the sealer at a rate of 10m²/litre/coat and allow 2-4 hours between coats.

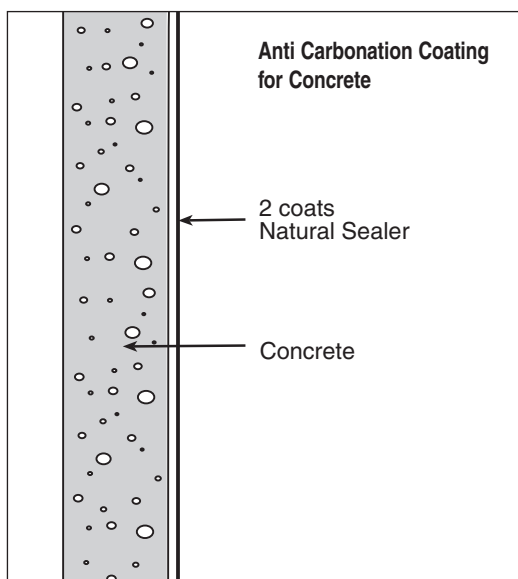

- **ADELAIDE** 467 - 469 SOUTH RD REGENCY PARK 5010 PH: (08) 8346 8013 FAX: (08) 8340 2052
- **BRISBANE** 45 COULSON ST WACOL 4076 PH: (07) 3271 2944 FAX: (07) 3271 3892
- **MELBOURNE** 11 GABRIELLE CT BAYSWATER NORTH 3153 PH: (03) 9761 4711 FAX: (03) 9761 4748
- **PERTH** 11 COLLIE ST WELSHPOOL 6106 PH: (08) 9356 9999 FAX: (08) 9356 9955
- **SYDNEY** 2/31-33 NEWTON RD WETHERILL PARK 2164 PH: (02) 9756 3533 FAX: (02) 9756 3534
- **AUCKLAND** 16 CARPENTER RD EAST TAMAKI PH: (09) 273 5444 FAX: 0800 266 236
- **KUALA LUMPUR** LOT 2 JALAN KECABI 33/2 ELITE INDUSTRIAL ESTATE OFF JALAN BUKIT KEMUNING 40000 SHAB ALAM PH: (603) 5122 2522 FAX: (603) 5122 2526

"The information contained in this technical publication is based on our current knowledge and experience and is provided as a guide only. In view of the many factors that may affect application it is the users sole responsibility to ensure suitability for a specific purpose."